

NRB 0282-0754

Air-water chiller

Cooling capacity 56 ÷ 202 kW

- High seasonal efficiency
- Night mode
- Reduced amount of refrigerant
- Compact dimensions



DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications. The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

VERSIONS

- ° Standard
- A High efficiency
- E Silenced high efficiency
- L Standard silenced
- N Silenced very high efficiency
- U Very high efficiency

FEATURES

Operating field

Operation at full load up to 51°C external air temperature. Unit can produce chilled water (up to -10°C of water produced in some versions).

Dual-circuit unit

The units according to the size are mono or dual-circuit, to ensure maximum efficiency both at full load and at partial load.

New condensing Coils

The whole range uses copper - aluminium condensation coils with reduced diameter rows, allowing a lower quantity of gas to be used compared to traditional coils.

Electronic expansion valve

The possibility to use electronic expansion valve, available to configurator, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

Integrated hydronic kit

Integrated hydronic kit containing the main hydraulic components; available with various configurations with one or two pumps, with high or low head and storage tank, to obtain a solution that allows you to save money and to facilitate installation.

CONTROL

Microprocessor adjustment, with keyboard and LCD display, for easy access on the unit is a menu available in several languages.

- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Floating HP control:** available for all models with inverter fans or with DCPX. Allows, with continuous fan modulation, to optimize the operation of the unit in any operating point, ensuring an increase in the energy efficiency at partial load.
- **Night Mode:** it is possible to set a silenced operation profile. Perfect for night operation since it guarantees greater acoustic comfort in the evenings, and a high efficiency in the time of greater load. **Night Mode for standard versions is mandatory DCPX accessory (standard on all low noise versions) or "J" inverter fan**

ACCESSORIES

AER485P1: RS-485 interface for supervision systems with MODBUS protocol.

AERBACP: Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP

AERLINK: Wifi Gateway with an RS485 serial port that can be installed on all machines or on all controllers having an RS485 serial port themselves. The module is capable of simultaneously activating the AP WIFI (Access point) and WIFI Station functions, the latter making it possible to connect to the home or business LAN both with VMF-E5 and E6. To facilitate certain management and control operations of the unit, the AERAPP application is available both for Android and iOS systems.

AERNET: The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.

MULTICHILLER_EVO: Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.

PGD1: Allows you to control the unit at a distance.

SGD: Electronic expansion that enables connecting to the photovoltaic system and heat pumps to accumulate heat in the DHW tank or in the heating system during the photovoltaic production phase and release it at times when heating demand is highest.

DCPX: Device for condensation temperature control, with continuous speed modulation of fans by using a pressure transducer.

GP: Anti-intrusion grid.

VT: Anti-vibration supports.

FACTORY FITTED ACCESSORIES

DRE: Electronic device for peak current reduction.

RIF: Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

T6: Double safety valve with exchange cock, both on the high and low pressure branches.

C-TOUCH: 7", touch screen keyboard, which allows to navigate intuitively among the various screens, allowing to modify the operating parameters and graphically view the progress of some variables in real time.

COMPATIBILITY WITH VMF SYSTEM

For more information about VMF system, refer to the dedicated documentation.

ACCESSORIES COMPATIBILITY

Model	Ver	0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
AER48SP1	°A					*	*	*	*	*	*	*	*	*	*	*
	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*	*	*	*	*	*	*	*	*	*	*	*
AERBACP	°A					*	*	*	*	*	*	*	*	*	*	*
	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*	*	*	*	*	*	*	*	*	*	*	*
AERLINK	°A					*	*	*	*	*	*	*	*	*	*	*
	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*	*	*	*	*	*	*	*	*	*	*	*
AERNET	°A					*	*	*	*	*	*	*	*	*	*	*
	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*	*	*	*	*	*	*	*	*	*	*	*
MULTICHILLER_EVO	°A					*	*	*	*	*	*	*	*	*	*	*
	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*	*	*	*	*	*	*	*	*	*	*	*
PGD1	°A					*	*	*	*	*	*	*	*	*	*	*
	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*	*	*	*	*	*	*	*	*	*	*	*
SGD	E,L,N	*	*	*	*											
	U				*											

Condensation control temperature

Ver	0282	0302	0332	0352	0502	0552	0602	0604
Fans: °								
E,L	DCPX140	DCPX140	DCPX140	DCPX140	-	-	-	-
N	DCPX140	DCPX140	DCPX140	-	-	-	-	-
Fans: M								
°A	-	-	-	-	DCPX142	DCPX142	DCPX142	DCPX142
E,L	DCPX141	DCPX141	DCPX141	DCPX141	As standard	As standard	As standard	As standard
N	DCPX141	DCPX141	DCPX141	As standard	As standard	As standard	As standard	As standard
U	-	-	-	DCPX142	DCPX142	DCPX142	DCPX143	DCPX143
Ver	0652	0654	0682	0702	0704	0752	0754	
Fans: M								
°	DCPX142	DCPX142	DCPX143	DCPX143	DCPX143	DCPX143	DCPX143	
A	DCPX142	DCPX143	DCPX143	DCPX143	DCPX143	DCPX143	DCPX143	
E,L,N	As standard	As standard	As standard	As standard	As standard	As standard	As standard	
U	DCPX143	DCPX143	DCPX143	DCPX143	DCPX143	DCPX143	DCPX143	

Antivibration

Ver	0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Integrated hydronic kit: 00, I1, I2, I3, I4, P1, P2, P3, P4															
°	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22
A	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22
E	VT17	VT17	VT17	VT17	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22
L	VT17	VT17	VT17	VT17	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22
N	VT17	VT17	VT17	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT23	VT23	VT23	VT23
U	-	-	-	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT23	VT23	VT23	VT23
Integrated hydronic kit: 01, 02, 03, 04, 05, 06, 07, 08, 09, K1, K2, K3, K4															
°	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22
A	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22
E	VT13	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22
L	VT13	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22
N	VT13	VT13	VT13	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT23	VT23	VT23	VT23
U	-	-	-	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT23	VT23	VT23	VT23

Anti-intrusion grid

Ver	0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
°	-	-	-	-	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)
A	-	-	-	-	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)
E	GP3	GP4	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)
L	GP3	GP3	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)
N	GP4	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP14 x 4 (1)	GP14 x 4 (1)	GP14 x 4 (1)	GP14 x 4 (1)
U	-	-	-	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP14 x 4 (1)	GP14 x 4 (1)	GP14 x 4 (1)	GP14 x 4 (1)

(1) x _ indicates the quantity to buy

The accessory cannot be fitted on the configurations indicated with -

Power factor correction

Ver	0282	0302	0332	0352	0502	0552	0602	0604
°A	-	-	-	-	RIF0502	RIF0552	RIF0602	RIF0604
E,L,N	RIF0282	RIF0302	RIF0332	RIF0352	RIF0502	RIF0552	RIF0602	RIF0604
U	-	-	-	RIF0352	RIF0502	RIF0552	RIF0602	RIF0604

The accessory cannot be fitted on the configurations indicated with -

A grey background indicates the accessory must be assembled in the factory

Ver	0652	0654	0682	0702	0704	0752	0754
°A,E,L,N,U	RIF0652	RIF0652	RIF0682	RIF0702	RIF0704	RIF0752	RIF0754

A grey background indicates the accessory must be assembled in the factory

Device for peak current reduction

Ver	0282	0302	0332	0352	0502	0552	0602	0604
°A	-	-	-	-	DRENRB502 (1)	DRENRB552 (1)	DRENRB602 (1)	DRENRB604 (1)
E,L,N	DRENRB282 (1)	DRENRB302 (1)	DRENRB332 (1)	DRENRB352 (1)	DRENRB502 (1)	DRENRB552 (1)	DRENRB602 (1)	DRENRB604 (1)
U	-	-	-	DRENRB352 (1)	DRENRB502 (1)	DRENRB552 (1)	DRENRB602 (1)	DRENRB604 (1)

(1) Only for supplies of 400V 3N ~ 50Hz and 400V 3 ~ 50Hz. x 2 or x 3 (if present) indicates the quantity to be ordered.

The accessory cannot be fitted on the configurations indicated with -

A grey background indicates the accessory must be assembled in the factory

Ver	0652	0654	0682	0702	0704	0752	0754
°A,E,L,N,U	DRENRB652 (1)	DRENRB654 (1)	DRENRB682 (1)	DRENRB702 (1)	DRENRB704 (1)	DRENRB752 (1)	DRENRB754 (1)

(1) Only for supplies of 400V 3N ~ 50Hz and 400V 3 ~ 50Hz. x 2 or x 3 (if present) indicates the quantity to be ordered.

A grey background indicates the accessory must be assembled in the factory

Double safety valves

Ver	0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
°A	-	-	-	-	T6NRB8	T6NRB8	T6NRB8	T6NRB11	T6NRB8	T6NRB11	T6NRB9	T6NRB10	T6NRB12	T6NRB10	T6NRB12
E,L	T6NRB6	T6NRB6	T6NRB6	T6NRB6	T6NRB8	T6NRB8	T6NRB8	T6NRB11	T6NRB8	T6NRB11	T6NRB9	T6NRB10	T6NRB12	T6NRB10	T6NRB12
N	T6NRB6	T6NRB6	T6NRB6	T6NRB8	T6NRB8	T6NRB8	T6NRB8	T6NRB11	T6NRB8	T6NRB11	T6NRB9	T6NRB10	T6NRB12	T6NRB10	T6NRB12
U	-	-	-	T6NRB8	T6NRB8	T6NRB8	T6NRB8	T6NRB11	T6NRB8	T6NRB11	T6NRB9	T6NRB10	T6NRB12	T6NRB10	T6NRB12

The accessory cannot be fitted on the configurations indicated with -

A grey background indicates the accessory must be assembled in the factory

Touch screen keyboard

Ver	0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
°A,E,L,N,U	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH	C-TOUCH

A grey background indicates the accessory must be assembled in the factory

CONFIGURATOR

Field	Description
1,2,3	NRB
4,5,6,7	Size 0282, 0302, 0332, 0352, 0502, 0552, 0602, 0604, 0652, 0654, 0682, 0702, 0704, 0752, 0754
8	Operating field
°	Standard mechanic thermostatic valve (1)
X	Electronic thermostatic expansion valve (1)
Y	Double mechanical thermostat for low temperature (2)
Z	Low temperature electronic thermostatic valve (3)
9	Model
°	Cooling only
C	Motocondensing unit
10	Heat recovery
°	Without heat recovery
D	With desuperheater (4)
T	With total recovery (4)
11	Version
°	Standard
A	High efficiency
E	Silenced high efficiency
L	Standard silenced
N	Silenced very high efficiency
U	Very high efficiency
12	Coils
°	Copper-aluminium
R	Copper pipes-copper fins
S	Copper pipes-Tinned copper fins
V	Copper pipes-Coated aluminium fins
13	Fans
°	Standard (5)
J	Inverter
M	Oversized (6)
14	Power supply
°	400V ~ 3N 50Hz with magnet circuit breakers
15,16	Integrated hydronic kit
	Without hydronic kit
00	Without hydronic kit
	Kit with storage tank and pump/s
01	Storage tank with low head pump

Field	Description
02	Storage tank with low head pump + stand-by pump
03	Storage tank with high head pump
04	Storage tank with high head pump + stand-by pump
	Kit with pump/s and storage tank with holes for heaters
05	Storage tank with holes for heaters and single low head pump (7)
06	Storage tank with holes for heaters and pump low head + stand-by pump (7)
07	Storage tank with holes for heaters and single high head pump (7)
08	Storage tank with holes for heaters and pump high head + stand-by pump (7)
	Double loop
09	Double loop
	Kit with pump/s
P1	Single pump low head
P2	Pump low head + stand-by pump
P3	Single pump high head
P4	Pump high head + stand-by pump
	Kit with inverter pump/s to fixed speed
I1	Single low head pump + fixed speed inverter
I2	Single low head pump with fixed speed inverter + stand-by pump
I3	Single high head pump + fixed speed inverter
I4	Single high head pump with fixed speed inverter + stand-by pump
	Kit with storage tank and inverter pump/s to fixed speed
K1	Single low head pump + storage tank + fixed speed inverter
K2	Storage tank and low head pump with fixed speed inverter + stand-by pump
K3	Single high head pump + storage tank + fixed speed inverter
K4	Storage tank and low head pump with fixed speed inverter + stand-by pump
	Kit with storage tank and variable speed inverter pump/s
W1	Single low head pump + Storage tank + variable speed inverter (8)
W2	Double low head pump + Storage tank + variable speed inverter (8)
W3	Single high head pump + Storage tank + variable speed inverter (8)
W4	Double high head pump + Storage tank + variable speed inverter (8)

(1) Water produced from 4 °C ÷ 18 °C

(2) Water produced from -10 °C ÷ 18 °C

(3) Water produced from 4 °C ÷ 18 °C for ° version; -10 °C for the others versions

(4) For "YT" - "ZT" - "YD" and "ZD" recovery versions, contact the headquarters; Warning: on the recovery side, a minimum input temperature of 35°C must always be guaranteed on the heat exchanger. For more information about the unit operating range, refer to the Magellano selection program

(5) As standard in sizes from 0282 to 0352 versions E - L and in size from 0282 to 0332 version N

(6) As standard in sizes from 0502 to 0754 version ° - A - E - L, in sizes from 0352 to 0754 version N - U

(7) Storage tanks with holes for supplementary heaters (not provided) are sent from the factory with plastic protection caps. Before loading the system, if the installation of one or all resistances is not expected, all plastic caps must be replaced with the special caps, commonly commercially available.

(8) L'opzione Y e Z non è compatibile con W1/W2/W3/W4

PERFORMANCE SPECIFICATIONS

Included units with ¹⁰¹ fans.

NRB - L

Size		0282	0302	0332	0352
Fans: °					
Cooling performance 12 °C / 7 °C (1)					
Cooling capacity	kW	56,5	64,3	73,9	85,5
Input power	kW	19,8	22,2	24,8	29,6
Cooling total input current	A	35,0	41,0	46,0	54,0
EER	W/W	2,85	2,90	2,98	2,89
Water flow rate system side	l/h	9734	11090	12722	14734
Pressure drop system side	kPa	37	48	39	52

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - E

Size		0282	0302	0332	0352
Fans: °					
Cooling performance 12 °C / 7 °C (1)					
Cooling capacity	kW	60,6	68,4	77,0	89,2
Input power	kW	18,6	21,1	23,8	28,3
Cooling total input current	A	32,0	36,0	41,0	46,0
EER	W/W	3,26	3,24	3,23	3,16
Water flow rate system side	l/h	10429	11774	13258	15372
Pressure drop system side	kPa	26	33	30	40

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - N

Size		0282	0302	0332
Fans: °				
Cooling performance 12 °C / 7 °C (1)				
Cooling capacity	kW	60,8	69,0	76,9
Input power	kW	17,8	20,5	22,9
Cooling total input current	A	33,0	39,0	44,0
EER	W/W	3,42	3,37	3,36
Water flow rate system side	l/h	10460	11884	13249
Pressure drop system side	kPa	27	25	31

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

Included units with 'M' fans.

NRB - °

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M																
Cooling performance 12 °C / 7 °C (1)																
Cooling capacity	kW	-	-	-	-	98,4	107,0	125,9	125,5	135,1	141,0	159,7	178,9	170,7	195,7	193,5
Input power	kW	-	-	-	-	33,2	37,5	41,6	45,6	47,4	52,2	54,8	60,8	58,3	71,8	67,2
Cooling total input current	A	-	-	-	-	59,0	65,0	71,0	80,0	81,0	92,0	93,0	102,0	104,0	117,0	117,0
EER	W/W	-	-	-	-	2,96	2,85	3,03	2,75	2,85	2,70	2,92	2,95	2,93	2,73	2,88
Water flow rate system side	l/h	-	-	-	-	16941	18444	21694	21620	23270	24282	27502	30805	29385	33700	33309
Pressure drop system side	kPa	-	-	-	-	39	46	42	50	49	48	52	66	71	78	65

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - L

Size		0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M												
Cooling performance 12 °C / 7 °C (1)												
Cooling capacity	kW	96,3	104,5	122,6	121,5	131,1	134,8	156,1	174,3	166,4	189,9	187,4
Input power	kW	34,0	38,6	42,9	47,6	49,2	55,0	56,0	62,5	60,0	74,7	69,5
Cooling total input current	A	59,0	65,0	72,0	82,0	82,0	95,0	93,0	102,0	105,0	119,0	119,0
EER	W/W	2,83	2,71	2,86	2,55	2,67	2,45	2,79	2,79	2,78	2,54	2,70
Water flow rate system side	l/h	16583	18007	21114	20937	22592	23230	26870	30010	28645	32685	32255
Pressure drop system side	kPa	37	43	40	46	45	44	50	62	66	73	61

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - A

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M																
Cooling performance 12 °C / 7 °C (1)																
Cooling capacity	kW	-	-	-	-	103,9	114,8	130,1	129,7	140,0	150,2	167,9	186,9	176,8	207,6	198,8
Input power	kW	-	-	-	-	31,4	35,4	40,3	43,5	45,0	47,6	51,9	59,2	56,6	69,6	63,8
Cooling total input current	A	-	-	-	-	55,0	59,0	68,0	73,0	74,0	77,0	86,0	94,0	98,0	103,0	107,0
EER	W/W	-	-	-	-	3,31	3,24	3,23	2,98	3,11	3,16	3,24	3,16	3,12	2,98	3,11
Water flow rate system side	l/h	-	-	-	-	17889	19764	22404	22344	24116	25867	28897	32172	30430	35736	34210
Pressure drop system side	kPa	-	-	-	-	30	36	35	42	40	57	46	56	55	60	58

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - E

Size		0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M												
Cooling performance 12 °C / 7 °C (1)												
Cooling capacity	kW	100,4	110,5	123,9	122,2	132,4	144,8	161,4	178,0	168,2	195,9	187,7
Input power	kW	32,5	36,9	42,7	46,6	48,2	49,4	54,0	62,6	59,7	74,7	68,0
Cooling total input current	A	54,0	59,0	69,0	75,0	77,0	77,0	86,0	95,0	100,0	107,0	110,0
EER	W/W	3,09	3,00	2,90	2,62	2,75	2,93	2,99	2,84	2,82	2,62	2,76
Water flow rate system side	l/h	17275	19020	21329	21052	22807	24939	27779	30648	28950	33719	32307
Pressure drop system side	kPa	27	33	32	36	36	52	42	51	49	53	52

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - U

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M																
Cooling performance 12 °C / 7 °C (1)																
Cooling capacity	kW	-	-	-	92,7	104,5	117,2	132,1	137,9	146,8	152,9	171,6	191,4	180,5	209,6	202,9
Input power	kW	-	-	-	27,1	30,8	34,5	38,8	41,3	44,2	45,5	50,7	59,3	56,2	67,2	63,1
Cooling total input current	A	-	-	-	51,0	56,0	61,0	68,0	76,0	76,0	86,0	88,0	101,0	104,0	116,0	115,0
EER	W/W	-	-	-	3,42	3,39	3,40	3,40	3,34	3,32	3,36	3,39	3,23	3,21	3,12	3,21
Water flow rate system side	l/h	-	-	-	15945	17984	20172	22745	23741	25275	26327	29532	32945	31067	36076	34915
Pressure drop system side	kPa	-	-	-	24	30	29	38	34	36	42	41	51	48	61	56

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

NRB - N

Size		0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M													
Cooling performance 12 °C / 7 °C (1)													
Cooling capacity	kW	89,7	100,8	112,4	128,6	133,5	142,2	147,1	164,5	185,1	174,5	201,1	195,1
Input power	kW	27,8	31,9	36,1	39,4	42,4	45,3	47,2	52,9	60,9	57,5	70,2	65,3
Cooling total input current	A	50,0	55,0	62,0	66,0	74,0	75,0	85,0	88,0	100,0	102,0	116,0	114,0
EER	W/W	3,23	3,16	3,12	3,26	3,15	3,14	3,11	3,11	3,04	3,03	2,87	2,99
Water flow rate system side	l/h	15444	17352	19347	22150	22978	24481	25334	28325	31856	30031	34611	33586
Pressure drop system side	kPa	22	28	27	36	32	34	39	38	48	45	56	52

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

ENERGY INDICES (REG. 2016/2281 EU)

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: °																
SEER - 12/7 (EN14825:2018) (1)																
SEER	°A,U	W/W	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	W/W	4,48	4,58	4,49	4,42	-	-	-	-	-	-	-	-	-	-
	L	W/W	4,28	4,27	4,35	4,25	-	-	-	-	-	-	-	-	-	-
	N	W/W	4,68	4,72	4,62	-	-	-	-	-	-	-	-	-	-	-
Seasonal efficiency	°A,U	%	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	%	176,20	180,20	176,40	173,60	-	-	-	-	-	-	-	-	-	-
	L	%	168,10	167,80	171,10	167,00	-	-	-	-	-	-	-	-	-	-
	N	%	184,00	185,70	181,70	-	-	-	-	-	-	-	-	-	-	-
SEER - 23/18 (EN14825:2018) (2)																
SEER	°A,U	W/W	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	W/W	5,36	5,48	5,40	5,44	-	-	-	-	-	-	-	-	-	-
	L	W/W	5,05	5,10	5,21	5,09	-	-	-	-	-	-	-	-	-	-
	N	W/W	5,61	5,67	5,59	-	-	-	-	-	-	-	-	-	-	-
Seasonal efficiency	°A,U	%	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	%	211,40	216,30	213,10	214,70	-	-	-	-	-	-	-	-	-	-
	L	%	199,00	201,10	205,30	200,70	-	-	-	-	-	-	-	-	-	-
	N	%	221,40	223,80	220,60	-	-	-	-	-	-	-	-	-	-	-

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Calculation performed with FIXED water flow rate.

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
SEPR - (EN 14825:2018) (2)																
SEPR	°A,U	W/W	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	W/W	6,46	6,42	6,13	6,36	-	-	-	-	-	-	-	-	-	-
	L	W/W	6,15	6,00	5,97	6,07	-	-	-	-	-	-	-	-	-	-
	N	W/W	6,71	6,53	6,23	-	-	-	-	-	-	-	-	-	-	-

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Calculation performed with FIXED water flow rate.

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: J																
SEER - 12/7 (EN14825:2018) (1)																
SEER	°	W/W	-	-	-	-	4,34	4,23	4,39	4,12	4,26	4,11	4,28	4,26	4,13	4,24
	A	W/W	-	-	-	-	4,48	4,48	4,59	4,20	4,48	4,13	4,49	4,40	4,34	4,44
	E	W/W	4,59	4,69	4,60	4,52	4,48	4,46	4,53	4,16	4,34	4,18	4,51	4,32	4,13	4,33
	L	W/W	4,38	4,37	4,46	4,35	4,36	4,24	4,38	4,11	4,18	4,12	4,32	4,23	4,13	4,19
	N	W/W	4,79	4,84	4,73	4,81	4,68	4,76	4,84	4,53	4,72	4,39	4,77	4,60	4,35	4,56
	U	W/W	-	-	-	4,74	4,71	4,82	4,65	4,33	4,66	4,31	4,76	4,53	4,22	4,52
Seasonal efficiency	°	%	-	-	-	-	170,60	166,20	172,60	161,80	167,30	161,40	168,20	167,40	162,20	166,60
	A	%	-	-	-	-	176,20	176,20	180,60	165,00	176,20	162,20	176,60	173,00	170,60	174,60
	E	%	180,60	184,60	181,00	177,80	176,20	175,40	178,20	163,40	170,60	164,20	177,40	169,80	162,20	170,20
	L	%	172,20	171,80	175,40	171,00	171,40	166,60	172,20	161,40	164,20	161,80	169,80	166,20	162,20	164,60
	N	%	188,60	190,60	186,20	189,40	184,20	187,40	190,60	178,20	185,80	172,60	187,80	181,00	171,00	179,40
	U	%	-	-	-	186,80	185,40	189,80	183,00	170,20	183,40	169,40	187,40	178,20	165,80	177,80

SEER - 23/18 (EN14825:2018) (2)																
SEER	°	W/W	-	-	-	-	5,31	5,07	5,29	4,89	5,04	4,93	5,13	5,12	5,01	4,99
	A	W/W	-	-	-	-	5,55	5,42	5,54	5,06	5,36	5,11	5,43	5,23	5,30	5,24
	E	W/W	5,50	5,62	5,55	5,58	5,47	5,41	5,37	4,88	5,10	5,05	5,37	5,06	4,93	5,02
	L	W/W	5,17	5,22	5,34	5,22	5,27	5,00	5,12	4,81	4,89	4,82	5,13	4,92	4,91	4,83
	N	W/W	5,75	5,82	5,73	5,91	5,72	5,68	5,88	5,49	5,67	5,29	5,71	5,46	5,27	5,38
	U	W/W	-	-	-	5,92	5,86	5,85	5,72	5,32	5,68	5,30	5,79	5,45	5,22	5,41
Seasonal efficiency	°	%	-	-	-	-	209,30	199,60	208,40	192,70	198,50	194,20	202,20	201,60	197,50	196,50
	A	%	-	-	-	-	219,00	213,90	218,60	199,50	211,30	201,30	214,10	206,30	208,80	206,60
	E	%	216,80	221,60	218,80	220,00	215,70	213,30	211,80	192,00	200,80	199,10	211,60	199,30	194,00	197,90
	L	%	203,80	205,90	210,60	205,60	207,70	197,10	201,70	189,40	192,70	189,70	202,00	193,60	193,20	190,00
	N	%	227,00	229,80	226,30	233,30	225,80	224,10	232,30	216,40	223,70	208,50	225,30	215,30	207,60	212,10
	U	%	-	-	-	233,80	231,40	231,10	225,80	209,60	224,00	209,00	228,70	214,90	205,70	213,40

SEPR - (EN 14825:2018) (2)																
SEPR	°	W/W	-	-	-	-	5,79	5,61	5,74	5,62	5,66	5,57	5,59	5,84	5,94	5,45
	A	W/W	-	-	-	-	6,10	5,97	6,00	5,73	5,97	5,74	5,92	5,79	5,89	5,75
	E	W/W	6,46	6,42	6,13	6,36	5,98	5,95	5,79	5,41	5,72	5,68	5,83	5,67	5,69	5,51
	L	W/W	6,15	6,00	5,97	6,07	5,79	5,65	5,61	5,31	5,55	5,28	5,58	5,60	5,77	5,37
	N	W/W	6,71	6,53	6,23	6,54	6,22	6,21	6,16	6,12	6,14	5,93	6,09	5,97	6,08	5,83
	U	W/W	-	-	-	6,43	6,30	6,31	6,01	6,15	6,09	5,88	6,19	5,88	6,05	5,85

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Calculation performed with FIXED water flow rate.

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M																
SEER - 12/7 (EN14825:2018) (1)																
SEER	°	W/W	-	-	-	-	4,23	4,13	4,29	-(2)	4,16	-(2)	4,18	4,16	-(2)	4,14
	A	W/W	-	-	-	-	4,37	4,37	4,48	-(2)	4,37	-(2)	4,38	4,29	-(2)	4,33
	E	W/W	4,48	4,58	4,49	4,42	4,37	4,35	4,42	-(2)	4,24	-(2)	4,40	4,21	-(2)	4,23
	L	W/W	4,28	4,27	4,35	4,27	4,25	4,14	4,27	-(2)	4,11	-(2)	4,22	4,13	-(2)	4,11
	N	W/W	4,68	4,72	4,62	4,69	4,56	4,65	4,72	4,42	4,61	4,28	4,65	4,49	4,24	4,45
	U	W/W	-	-	-	4,62	4,59	4,71	4,54	4,22	4,54	4,20	4,64	4,42	4,11	4,41
Seasonal efficiency	°	%	-	-	-	-	166,20	162,20	168,40	-(2)	163,40	-(2)	164,10	163,40	-(2)	162,50
	A	%	-	-	-	-	171,90	171,60	176,10	-(2)	171,70	-(2)	172,20	168,70	-(2)	170,20
	E	%	176,20	180,20	176,40	173,60	171,70	171,00	173,80	-(2)	166,50	-(2)	172,80	165,50	-(2)	166,00
	L	%	168,10	167,80	171,10	167,00	167,00	162,50	167,80	-(2)	161,20	-(2)	165,70	162,10	-(2)	161,30
	N	%	184,00	185,70	181,70	184,70	179,50	182,90	185,90	173,70	181,20	168,20	182,90	176,40	166,70	174,90
	U	%	-	-	-	181,70	180,60	185,20	178,50	165,60	178,70	165,10	182,50	173,80	161,40	173,30

SEER - 23/18 (EN14825:2018) (3)																
SEER	°	W/W	-	-	-	-	5,17	4,95	5,16	4,77	4,95	4,80	5,01	4,99	4,86	4,82
	A	W/W	-	-	-	-	5,42	5,28	5,40	4,91	5,22	4,94	5,29	5,10	4,95	5,11
	E	W/W	5,36	5,48	5,40	5,44	5,33	5,27	5,24	4,68	4,97	4,93	5,23	4,93	4,81	4,90
	L	W/W	5,05	5,10	5,21	5,09	5,13	4,88	4,99	4,65	4,77	4,52	5,00	4,79	4,78	4,67
	N	W/W	5,61	5,67	5,59	5,76	5,58	5,54	5,74	5,35	5,53	5,12	5,56	5,32	5,13	5,24
	U	W/W	-	-	-	5,77	5,71	5,71	5,58	5,18	5,53	5,17	5,64	5,32	5,08	5,27

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Non-compliant with 2016/2281 EU regulation for comfort applications 12°C / 7°C

(3) Calculation performed with FIXED water flow rate.

Size			0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Seasonal efficiency	°	%	-	-	-	-	203,90	194,80	203,30	187,70	195,10	189,00	197,30	196,70	191,50	189,90	193,00
	A	%	-	-	-	-	213,60	208,30	213,10	193,50	205,80	194,60	208,70	201,10	194,90	201,30	196,70
	E	%	211,40	216,30	213,10	214,70	210,20	207,90	206,50	184,00	195,90	194,00	206,10	194,20	189,20	193,00	186,50
	L	%	199,00	201,10	205,30	200,70	202,30	192,30	196,60	183,10	187,90	177,60	197,10	188,70	188,10	183,80	186,40
	N	%	221,40	223,80	220,60	227,50	220,00	218,70	226,60	210,90	218,20	203,00	219,50	209,70	202,20	206,70	199,90
	U	%	-	-	-	227,60	225,50	225,40	220,30	204,00	218,30	203,60	222,70	209,60	200,00	207,90	199,90
SEPR - (EN 14825:2018) (3)																	
SEPR	°	W/W	-	-	-	-	5,79	5,61	5,74	5,62	5,66	5,57	5,59	5,84	5,94	5,45	5,76
	A	W/W	-	-	-	-	6,10	5,97	6,00	5,73	5,97	5,74	5,92	5,79	5,89	5,75	5,78
	E	W/W	6,46	6,42	6,13	6,36	5,98	5,95	5,79	5,41	5,72	5,68	5,83	5,67	5,69	5,51	5,47
	L	W/W	6,15	6,00	5,97	6,07	5,79	5,65	5,61	5,31	5,55	5,28	5,58	5,60	5,77	5,37	5,53
	N	W/W	6,71	6,53	6,23	6,54	6,22	6,12	6,16	6,12	6,14	5,93	6,09	5,97	6,08	5,83	5,90
	U	W/W	-	-	-	6,43	6,30	6,31	6,01	6,15	6,09	5,88	6,19	5,88	6,05	5,85	6,07

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Non-compliant with 2016/2281 EU regulation for comfort applications 12°C / 7°C

(3) Calculation performed with FIXED water flow rate.

ELECTRIC DATA

Size			0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Electric data																	
Maximum current (FLA)	°	A	-	-	-	-	72,2	77,1	86,0	98,2	94,9	111,3	112,7	127,3	131,4	144,0	141,2
	A	A	-	-	-	-	72,2	77,1	86,0	98,2	94,9	114,5	112,7	127,3	131,4	144,0	141,2
	E	A	42,6	49,2	56,9	65,3	72,2	77,1	86,0	98,2	94,9	114,5	112,7	127,3	131,4	144,0	141,2
	L	A	41,5	49,2	55,8	65,3	72,2	77,1	86,0	98,2	94,9	111,3	112,7	127,3	131,4	144,0	141,2
	N	A	42,6	50,3	56,9	67,3	72,2	77,1	89,2	101,3	98,1	114,5	112,7	130,5	134,6	147,2	144,4
	U	A	-	-	-	67,3	72,2	77,1	89,2	101,3	98,1	114,5	112,7	130,5	134,6	147,2	144,4
Peak current (LRA)	°	A	-	-	-	-	277,6	282,5	329,2	211,9	338,1	225,1	363,8	378,4	274,9	476,4	346,6
	A	A	-	-	-	-	277,6	282,5	329,2	211,9	338,1	228,3	363,8	378,4	274,9	476,4	346,6
	E	A	148,0	163,0	170,6	208,9	277,6	282,5	329,2	211,9	338,1	228,3	363,8	378,4	274,9	476,4	346,6
	L	A	146,9	163,0	169,5	208,9	277,6	282,5	329,2	211,9	338,1	225,1	363,8	378,4	274,9	476,4	346,6
	N	A	148,0	164,1	170,6	210,8	277,6	282,5	332,4	215,1	341,3	228,3	363,8	381,6	278,1	479,6	349,8
	U	A	-	-	-	210,8	277,6	282,5	332,4	215,1	341,3	228,3	363,8	381,6	278,1	479,6	349,8

GENERAL TECHNICAL DATA

Size			0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Compressor																	
Type	°A,E,L,N,U	type	Scroll														
Number	°A	no.	-	-	-	-	2	2	2	4	2	4	2	2	4	2	4
	E,L,N	no.	2	2	2	2	2	2	2	4	2	4	2	2	4	2	4
	U	no.	-	-	-	2	2	2	2	4	2	4	2	2	4	2	4
Circuits	°A	no.	-	-	-	-	1	1	1	2	1	2	1	1	2	1	2
	E,L,N	no.	1	1	1	1	1	1	1	2	1	2	1	1	2	1	2
	U	no.	-	-	-	1	1	1	1	2	1	2	1	1	2	1	2
Refrigerant	°A,E,L,N,U	type	R410A														
System side heat exchanger																	
Type	°A,E,L,N,U	type	Brazen plate														
Number	°A	no.	-	-	-	-	1	1	1	1	1	1	1	1	1	1	1
	E,L,N	no.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	U	no.	-	-	-	1	1	1	1	1	1	1	1	1	1	1	1
Hydraulic connections																	
Sizes (in/out)	°A	Ø	-	-	-	-	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2
	E,L,N	Ø	2" 1/2														
	U	Ø	-	-	-	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2

G.s. = Grooved joints


Fans

Size			0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: °																	
Fan																	
Fan motor	°A,U	type	Asynchronous														
	E,L,N	type	Asynchronous with phase cut														
Air flow rate	°A,U	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	m³/h	20700	22200	27500	24800	-	-	-	-	-	-	-	-	-	-	-
	L	m³/h	15200	20700	22200	27500	-	-	-	-	-	-	-	-	-	-	-
	N	m³/h	22200	27500	24800	-	-	-	-	-	-	-	-	-	-	-	-
Sound data calculated in cooling mode (1)																	
Sound power level	°A,U	dB(A)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	dB(A)	72,4	72,9	73,7	73,9	-	-	-	-	-	-	-	-	-	-	-
	L	dB(A)	71,8	72,9	73,3	73,9	-	-	-	-	-	-	-	-	-	-	-
	N	dB(A)	72,4	73,3	73,7	-	-	-	-	-	-	-	-	-	-	-	-
(1) Sound power: calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure measured in free field (in compliance with UNI EN ISO 3744).																	
Size			0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: M																	
Increased fan																	
Fan motor	°A,U	type	Asynchronous														
	E,L,N	type	Asynchronous with phase cut														
With static pressure																	
Air flow rate	°	m³/h	-	-	-	-	36600	36600	35100	35100	35100	33700	55200	53100	53100	53100	53100
	A	m³/h	-	-	-	-	35100	35100	33800	33800	33700	53100	53100	51100	51100	51100	51100
	E	m³/h	20700	22200	27500	24800	26800	26800	25600	25600	25600	40500	40500	38800	38800	38800	38800
	L	m³/h	15200	20700	22200	27500	30900	30900	29500	29500	46500	44600	44600	29500	28300	44600	44600
	N	m³/h	22200	27500	24800	26800	25600	25600	40500	40500	40500	38800	38800	54600	54600	54600	54600
	U	m³/h	-	-	-	35100	33700	33700	53100	53100	53100	51100	51100	71200	71200	71200	71200
High static pressure	°A,U	Pa	-	-	-	-	50	50	50	50	50	50	50	50	50	50	50
	E,L	Pa	80	80	80	80	50	50	50	50	50	50	50	50	50	50	50
	N	Pa	80	80	80	50	50	50	50	50	50	50	50	50	50	50	50
Sound power level	°	dB(A)	-	-	-	-	84,5	85,0	85,3	84,2	85,5	84,3	86,9	87,0	85,9	87,7	87,5
	A	dB(A)	-	-	-	-	84,5	85,0	85,3	84,2	85,5	84,3	86,9	87,0	85,9	87,7	87,5
	E	dB(A)	72,4	72,9	73,7	73,9	80,7	81,5	82,1	76,1	82,5	77,2	83,6	83,8	77,4	85,0	83,0
	L	dB(A)	71,8	72,9	73,3	73,9	80,7	81,5	82,1	76,1	82,5	76,5	83,6	83,8	77,4	85,0	83,5
	N	dB(A)	72,4	73,3	73,7	79,7	80,7	81,5	83,0	76,9	83,4	77,2	83,6	84,5	77,9	85,5	83,3
	U	dB(A)	-	-	-	84,0	84,5	85,0	86,6	85,8	86,8	85,9	86,9	87,9	87,0	88,5	88,5
Without Static pressure																	
Air flow rate	°	m³/h	-	-	-	-	42300	42300	40400	40400	40400	38700	63700	61000	61000	61000	61000
	A	m³/h	-	-	-	-	40400	40400	38600	38600	38600	61100	61000	58500	58500	58500	58500
	E	m³/h	-	-	-	-	26800	26800	25600	25600	25600	40500	40500	38800	38800	38800	38800
	L	m³/h	-	-	-	-	30900	30900	29500	29500	29500	28300	46500	44600	44600	44600	44600
	N	m³/h	-	-	-	26800	25600	25600	40500	40500	40500	38800	38800	54600	54600	54600	54600
	U	m³/h	-	-	-	45700	44000	44000	69000	69000	69000	66500	69000	66500	66500	66500	66500
High static pressure	°A,E,L	Pa	-	-	-	-	0	0	0	0	0	0	0	0	0	0	0
	N,U	Pa	-	-	-	0	0	0	0	0	0	0	0	0	0	0	0
Sound power level	°	dB(A)	-	-	-	-	86,6	86,8	87,0	86,0	87,1	86,0	88,2	88,3	87,7	88,6	88,5
	A	dB(A)	-	-	-	-	86,6	86,8	87,0	86,0	87,1	87,7	88,2	88,3	87,7	88,6	88,5
	E	dB(A)	-	-	-	-	80,7	81,5	82,1	76,1	82,5	77,2	83,6	83,8	77,4	85,0	83,0
	L	dB(A)	-	-	-	-	80,7	81,5	82,1	76,1	82,5	76,5	83,6	83,8	77,4	85,0	83,5
	N	dB(A)	-	-	-	79,7	80,7	81,5	83,0	76,9	83,4	77,2	83,6	84,5	77,9	85,5	83,3
	U	dB(A)	-	-	-	86,4	86,6	86,8	88,5	87,7	88,6	87,7	88,2	89,3	88,9	89,6	89,6

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Fans: J																
Inverter fan																
Fan motor	°A,E,L,N,U	type	Inverter													
Air flow rate	°	m³/h	-	-	-	-	36600	36600	35100	35100	35100	33700	55200	53100	53100	53100
	A	m³/h	-	-	-	-	35100	35100	33800	33800	33700	53100	53100	51100	51100	51100
	E	m³/h	20700	22200	27500	24800	26800	26800	25600	25600	25600	40500	40500	38800	38800	38800
	L	m³/h	15200	20700	22200	27500	30900	30900	29500	29500	29500	28300	46500	44600	44600	44600
	N	m³/h	22200	27500	24800	26800	25600	25600	40500	40500	40500	38800	38800	54600	54600	54600
	U	m³/h	-	-	-	35100	33700	33700	53100	53100	51100	71200	71200	53100	51100	71200
High static pressure	°A	Pa	-	-	-	-	120	120	120	120	120	120	120	120	120	120
	E,L	Pa	20	20	20	20	120	120	120	120	120	120	120	120	120	120
	N	Pa	20	20	20	120	120	120	120	120	120	120	120	120	120	120
	U	Pa	-	-	-	120	120	120	120	120	120	120	120	120	120	120
Sound data calculated in cooling mode (1)																
Sound power level	°	dB(A)	-	-	-	-	84,5	85,0	85,3	85,5	86,9	87,0	87,7	84,2	84,3	85,9
	A	dB(A)	-	-	-	-	84,5	85,0	85,3	85,5	86,9	87,0	87,7	84,2	85,9	85,9
	E	dB(A)	72,4	72,9	73,7	73,9	80,7	81,5	82,1	82,5	83,6	83,8	85,0	76,1	77,2	77,4
	L	dB(A)	71,8	72,9	73,3	73,9	80,7	81,5	82,1	82,5	83,6	83,8	85,0	76,1	76,5	77,4
	N	dB(A)	72,4	73,3	73,7	79,7	80,7	81,5	83,0	83,4	83,6	84,5	85,5	76,9	77,2	77,9
	U	dB(A)	-	-	-	84,0	84,5	85,0	86,6	86,8	86,9	87,9	88,5	85,8	85,9	87,0

(1) Sound power: calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure measured in free field (in compliance with UNI EN ISO 3744).

DIMENSIONS

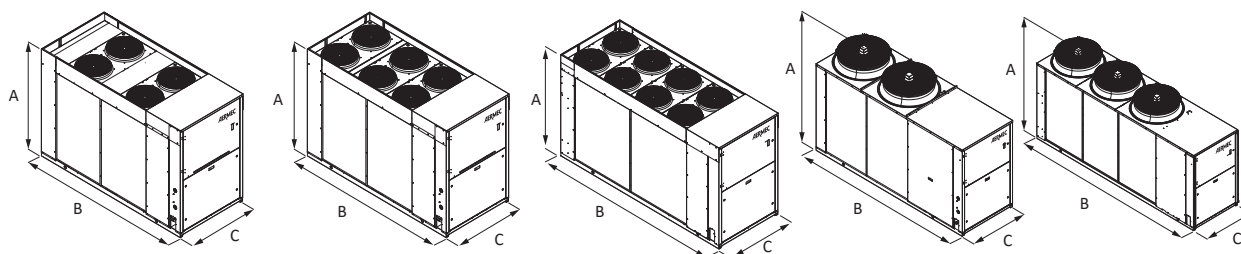

Size		0282	0302	0332	0352	0502	0552	0602	0604	0652	0654	0682	0702	0704	0752	0754
Dimensions and weights																
A	°A	mm	-	-	-	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898
	E,L	mm	1680	1680	1680	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898
	N	mm	1680	1680	1680	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898
	U	mm	-	-	-	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898	1898
B	°	mm	-	-	-	3200	3200	3200	3200	3200	3200	4010	4010	4010	4010	4010
	A	mm	-	-	-	3200	3200	3200	3200	3200	3200	4010	4010	4010	4010	4010
	E	mm	2450	2950	2950	2950	3200	3200	3200	3200	3200	4010	4010	4010	4010	4010
	L	mm	2450	2450	2950	2950	3200	3200	3200	3200	3200	4010	4010	4010	4010	4010
	N	mm	2950	2950	2950	3200	3200	3200	4010	4010	4010	4010	5200	5200	5200	5200
	U	mm	-	-	-	3200	3200	3200	4010	4010	4010	4010	5200	5200	5200	5200
C	°A	mm	-	-	-	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
	E,L,N	mm	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
	U	mm	-	-	-	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
Weights																
Without hydronic kit	°	kg	-	-	-	993	1018	1075	1160	1075	1210	1267	1427	1331	1440	1392
	A	kg	-	-	-	1046	1072	1116	1200	1116	1325	1347	1507	1410	1531	1471
	E	kg	828	889	912	962	1046	1072	1116	1347	1507	1531	1200	1325	1410	1471
	L	kg	810	828	894	907	993	1018	1075	1160	1075	1210	1267	1427	1331	1440
	N	kg	884	907	957	1020	1076	1109	1232	1243	1426	1647	1660	1327	1415	1549
	U	kg	-	-	-	1020	1076	1109	1232	1243	1426	1647	1660	1327	1415	1549

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com