NSH

Reversible air/water heat pump

Cooling capacity 251 ÷ 731 kW
Heating capacity 281 ÷ 786 kW

- **High efficiency also at partial loads**
- **Electronic expansion valve**

DESCRIPTION

Reversible outdoor heat pumps for the production of chilled/heated water designed to satisfy the needs of residential and commercial buildings, or for industrial applications.
The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

VERSIONS

A High efficiency
E Silenced high efficiency

FEATURES

Operating field

Working at full load up to -10 °C outside air temperature in winter, and up to 48°C in summer. Hot water production up to 55°C (for more details refer to the technical documentation).

Bi-tri circuit unit

The units are mono or dual-circuit, to ensure maximum efficiency both at full load and at partial load.

Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

Integrated hydronic kit

Integrated hydronic kit containing the main hydraulic components; available with various configurations with one or two pumps, high or low head, to obtain a solution that allows you to save money and to facilitate installation.

CONTROL

Microprocessor adjustment, with keyboard and LCD display,for easy access on the unit is a menu available in several languages.

— The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
— The temperature control takes place with the integral proportional logic, based on the water output temperature.

ACCESSORIES

AER485P1: RS-485 interface for supervision systems with MODBUS protocol.
AER485P1 x n° 2: RS-485 interface for supervision systems with MODBUS protocol.
AERBACP: Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP
AERNET: The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.
MULTICHILLER_EVO: Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.
PRV3: Allows you to control the chiller at a distance.
DCPX: Device for condensation temperature control, with continuous speed modulation of fans by using a pressure transducer.
AVX: Spring anti-vibration supports.

FACTORY FITTED ACCESSORIES

RIF: Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.
KRS: Electric heater for the heat exchanger
AK: Acoustic kit that lowers the noise level even further, thanks to the special coating on the panelling or on those components that produce the most noise in the unit. Available for the low noise version only.

ACCESSORIES COMPATIBILITY

Model	Ver	1251	1401	1402	1601	1602	1801	1802	2002	2202	2352	2502	2652	2802	3002	3202	3402	3602
AER485P1	A,E	•	•		•		•											
AER485P1 x n° 2 (1)	A,E			•		•		•	•	•	•	•	•	•	•	•	•	•
AERBACP	A,E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
AERNET	A,E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MULTICHILLER_EVO	A,E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
PRV3	A,E	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

(1) x Indicates the quantity of accessories to match.

Condensation control temperature

Ver	1251	1401	1402	1601	1602	1801	1802	2002	2202	2352	2502	2652	2802	3002	3202	3402	3602
A,E	DCPX69	DCPX69	DCPX68	DCPX69	DCPX68	DCPX69	DCPX68	DCPX73	DCPX73	DCPX73	DCPX73	DCPX73	DCPX73	DCPX73	DCPX73	DCPX73	DCPX73

Anti-intrusion grid

Ver	1251	1401	1402	1601	1602	1801	1802	2002	2202
A,E	GP300M	GP300M	GP300B	GP300M	GP300B	GP400M	GP400B	GP500B	GP500B

Ver	2352	2502	2652	2802	3002	3202	3402	3602
A,E	GP500B	GP500B	GP500B	GP500B	GP300M+300M	GP300M+300M	GP300M+400M	GP400M+400M

Antivibration

Ver	1251	1401	1402	1601	1602	1801	1802	2002	2202	2352	2502	2652	2802	3002	3202	3402	3602
Integrated hydronic kit: 00																	
A,E	AVX536	AVX536	AVX537	AVX536	AVX538	AVX540	AVX541	AVX543	AVX543	AVX545	AVX549	AVX551	AVX551	AVX554	AVX556	AVX557	AVX559
Integrated hydronic kit: PA																	
A,E	AVX536	AVX536	AVX537	AVX536	AVX538	AVX540	AVX541	AVX543	AVX543	AVX545	AVX550	AVX551	AVX551	AVX553	AVX553	AVX557	AVX559
Integrated hydronic kit: PC, PE, PG, PJ																	
A,E	AVX536	AVX536	AVX538	AVX536	AVX538	AVX540	AVX541	AVX543	AVX543	AVX545	AVX550	AVX551	AVX551	AVX553	AVX555	AVX557	AVX559

Heater exchangers

Ver	1251	1401	1402	1601	1602	1801	1802	2002	2202	2352	2502	2652	2802	3002	3202	3402	3602
A,E	KRS11	KRS11	KRS19	KRS11	KRS19	KRS11	KRS19	KRS19	KRS19	KRS19	KRS19	KRS19	KRS19	KRS14	KRS14	KRS14	KRS14

A grey background indicates the accessory must be assembled in the factory

Power factor correction

Ver	1251	1401	1402	1601	1602	1801	1802	2002	2202
A,E	RIFNSH1251	RIFNSH1401	RIFNSH1402	RIFNSH1601	RIFNSH1602	RIFNSH1801	RIFNSH1802	RIFNSH2002	RIFNSH2202

A grey background indicates the accessory must be assembled in the factory

Ver	2352	2502	2652	2802	3002	3202	3402	3602
A,E	RIFNSH2352	RIFNSH2502	RIFNSH2652	RIFNSH2802	RIFNSH3002	RIFNSH3202	RIFNSH3402	RIFNSH3602

A grey background indicates the accessory must be assembled in the factory

CONFIGURATOR

Field	Description
1,2,3	**NSH**
4,5,6,7	**Size** 1251, 1401, 1402, 1601, 1602, 1801, 1802, 2002, 2202, 2352, 2502, 2652, 2802, 3002, 3202, 3402, 3602
8	**Operating field**
X	Electronic thermostatic expansion valve
9	**Model**
H	Heat pump
10	**Heat recovery**
°	Without heat recovery
D	With desuperheater
11	**Version**
A	High efficiency
E	Silenced high efficiency
12	**Coils**
°	Copper-aluminium
R	Copper pipes-copper fins
S	Copper pipes-Tinned copper fins
V	Copper pieps-Coated aluminium fins
13	**Fans**
°	Standard
J	Inverter
14	**Power supply**
°	400V~3 50Hz with fuses
2	230V~3 50Hz with fuses (1)
4	230V~3 50Hz with magnet circuit breakers (1)
8	400V~3 50Hz with magnet circuit breakers
15,16	**Integrated hydronic kit**
	Without hydronic kit
00	Without hydronic kit
	Kit with n° 1 pump
PA	Pump A
PC	Pump C
PE	Pump E
PG	Pump G
PJ	Pump J (2)

(1) Not available for size from 1251 to 1801 and from 2352 to 3602
(2) For all configurations including pump J please contact the factory.

PERFORMANCE SPECIFICATIONS

NS - HA

Size		1251	1401	1402	1601	1602	1801	1802	2002	2202
Cooling performance 12 °C / 7 °C (1)										
Cooling capacity	kW	262,7	281,7	257,7	309,7	315,6	365,6	365,6	384,6	414,5
Input power	kW	86,9	95,0	94,9	107,8	108,3	128,3	125,3	132,5	138,8
Cooling total input current	A	149,0	164,0	168,0	185,0	186,0	215,0	216,0	227,0	233,0
EER	W/W	3,02	2,96	2,72	2,87	2,91	2,85	2,92	2,90	2,99
Water flow rate system side	l/h	45186	48451	44327	53262	54292	62883	62883	66147	71302
Pressure drop system side	kPa	38	41	36	27	50	43	43	47	53
Heating performance 40 °C / 45 °C (2)										
Heating capacity	kW	281,4	297,4	281,4	332,3	342,5	393,5	395,5	412,5	450,6
Input power	kW	88,2	94,2	93,2	104,0	106,8	126,7	123,7	133,9	141,3
Heating total input current	A	150,0	163,0	165,0	180,0	182,0	212,0	213,0	229,0	236,0
COP	W/W	3,19	3,16	3,02	3,20	3,21	3,11	3,20	3,08	3,19
Water flow rate system side	l/h	48838	51618	48838	57701	59439	68303	68651	71605	78210
Pressure drop system side	kPa	47	49	47	33	64	54	54	58	67

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C
(2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

Size		2352	2502	2652	2802	3002	3202	3402	3602
Cooling performance 12 °C / 7 °C (1)									
Cooling capacity	kW	454,6	499,5	524,5	547,5	591,5	619,6	675,5	731,4
Input power	kW	158,4	173,5	186,7	195,9	202,6	215,4	235,9	256,4
Cooling total input current	A	268,0	295,0	318,0	335,0	349,0	370,0	400,0	430,0
EER	W/W	2,87	2,88	2,81	2,80	2,92	2,88	2,86	2,85
Water flow rate system side	l/h	78174	85906	90201	94153	101712	106523	116144	125766
Pressure drop system side	kPa	37	38	40	43	34	27	35	43
Heating performance 40 °C / 45 °C (2)									
Heating capacity	kW	502,5	541,5	563,6	585,6	629,5	664,5	725,6	786,7
Input power	kW	157,9	171,0	177,1	185,4	198,0	207,8	230,4	253,1
Heating total input current	A	267,0	292,0	303,0	318,0	342,0	359,0	391,0	423,0
COP	W/W	3,18	3,17	3,18	3,16	3,18	3,20	3,15	3,11
Water flow rate system side	l/h	87247	94025	97849	101673	109320	115403	126004	136606
Pressure drop system side	kPa	49	47	49	53	41	33	43	54

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C
(2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

NS - HE

Size		1251	1401	1402	1601	1602	1801	1802	2002	2202
Cooling performance 12 °C / 7 °C (1)										
Cooling capacity	kW	250,7	266,7	242,7	292,7	301,6	343,6	349,6	366,6	394,5
Input power	kW	91,8	101,9	100,8	115,7	116,2	136,1	132,2	140,3	146,5
Cooling total input current	A	161,0	178,0	181,0	202,0	202,0	234,0	233,0	246,0	254,0
EER	W/W	2,73	2,62	2,41	2,53	2,60	2,52	2,65	2,61	2,69
Water flow rate system side	l/h	43125	45874	41750	50341	51887	59103	60134	63055	67865
Pressure drop system side	kPa	32	37	33	24	46	38	39	43	48
Heating performance 40 °C / 45 °C (2)										
Heating capacity	kW	281,4	297,4	281,4	332,3	342,5	393,5	395,5	412,5	450,6
Input power	kW	88,2	94,2	93,2	104,0	106,8	126,7	123,7	133,9	141,3
Heating total input current	A	150,0	163,0	165,0	180,0	182,0	212,0	213,0	229,0	236,0
COP	W/W	3,19	3,16	3,02	3,20	3,21	3,11	3,20	3,08	3,19
Water flow rate system side	l/h	48838	51618	48838	57701	59439	68303	68651	71605	78210
Pressure drop system side	kPa	47	49	47	33	64	54	54	58	67

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C
(2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

Size		2352	2502	2652	2802	3002	3202	3402	3602
Cooling performance 12 °C / 7 °C (1)									
Cooling capacity	kW	435,6	487,6	506,5	517,5	559,6	585,6	636,5	687,5
Input power	kW	169,3	192,4	202,5	210,6	217,4	231,2	251,6	272,0
Cooling total input current	A	293,0	333,0	349,0	365,0	380,0	403,0	436,0	468,0
EER	W/W	2,57	2,53	2,50	2,46	2,57	2,53	2,53	2,53
Water flow rate system side	l/h	74910	83844	87108	88998	96214	100681	109444	118206
Pressure drop system side	kPa	34	35	37	39	30	24	31	38
Heating performance 40 °C / 45 °C (2)									
Heating capacity	kW	502,5	541,5	563,6	585,6	629,5	664,5	725,6	786,7
Input power	kW	157,9	171,0	177,1	185,4	198,0	207,8	230,4	253,1
Heating total input current	A	267,0	292,0	303,0	318,0	342,0	359,0	391,0	423,0
COP	W/W	3,18	3,17	3,18	3,16	3,18	3,20	3,15	3,11
Water flow rate system side	l/h	87247	94025	97849	101673	109320	115403	126004	136606
Pressure drop system side	kPa	49	47	49	53	41	33	43	54

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C
(2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

ENERGY DATA

Size			1251	1401	1402	1601	1602	1801	1802	2002	2202	2352	2502	2652	2802	3002	3202	3402	3602
UE 813/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 400 kW (1)																			
Pdesignh	A,E	kW	185	195	185	218	225	259	260	271	297	330	356	370	385	325	342	374	400
SCOP	A,E	W/W	3,33	3,28	3,23	3,33	3,33	3,23	3,33	3,20	3,30	3,30	3,30	3,33	3,30	3,35	3,40	3,33	3,28
ηsh	A,E	%	130.0%	128.0%	126.0%	130.0%	130.0%	126.0%	130.0%	125.0%	129.0%	129.0%	129.0%	130.0%	129.0%	131.0%	133.0%	130.0%	128.0%
SEER - 12/7 (EN14825:2018) with standard fans (2)																			
SEER	A	W/W	3,88	3,81	3,46	3,76	3,68	3,71	3,73	3,70	3,80	3,72	3,74	3,66	3,64	3,81	3,76	3,73	3,72
	E	W/W	3,41	3,28	3,00	3,19	3,23	3,19	3,32	3,28	3,37	3,28	3,23	3,18	3,12	3,30	3,25	3,23	3,23
Seasonal efficiency	A	%	152.1%	149.4%	135.2%	147.4%	144.2%	145.2%	146.0%	145.0%	149.0%	145.7%	146.6%	143.5%	142.5%	149.5%	147.5%	146.1%	145.8%
	E	%	133.4%	128.1%	116.8%	124.4%	126.2%	124.7%	129.7%	128.2%	131.8%	128.1%	126.3%	124.3%	121.7%	129.1%	126.9%	126.1%	126.2%

(1) Efficiencies for low temperature applications (35 °C)
(2) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

ELECTRIC DATA

Size			1251	1401	1402	1601	1602	1801	1802	2002	2202
Electric data											
Maximum current (FLA)	A,E	A	209,0	242,0	276,0	258,0	276,0	316,0	325,0	352,0	370,0
Peak current (LRA)	A,E	A	327,0	387,0	251,0	431,0	251,0	472,0	305,0	313,0	350,0

Size			2352	2502	2652	2802	3002	3202	3402	3602
Electric data										
Maximum current (FLA)	A,E	A	390,0	410,0	443,0	476,0	500,0	516,0	574,0	631,0
Peak current (LRA)	A,E	A	365,0	436,0	461,0	521,0	534,0	578,0	612,0	653,0

GENERAL TECHNICAL DATA

Size			1251	1401	1402	1601	1602	1801	1802	2002	2202
Compressor											
Type	A,E	type	Screw								
Number	A,E	no.	1	1	2	1	2	1	2	2	2
Circuits	A,E	no.	1	1	2	1	2	1	2	2	2
Refrigerant	A,E	type	R134a								
System side heat exchanger											
Type	A,E	type	Shell and tube								
Number	A,E	no.	1	1	2	1	2	1	2	2	1
System side hydraulic connections											
Connections (in/out)	A,E	Type	Grooved joints								
Sizes (in/out)	A,E	Ø	6"								
Fan											
Type	A,E	type	Axial								
Fan motor	A	type	Asynchronous								
	E	type	Asynchronous with phase cut								
Number	A,E	no.	6	6	6	6	6	8	8	10	10
Air flow rate	A	m^3/h	117600	117600	117600	112200	112200	156000	153200	196000	196000
	E	m^3/h	82320	117600	82320	78540	78540	109200	107240	137200	137200
Sound data calculated in cooling mode (1)											
Sound power level	A	dB(A)	94,0	94,0	94,0	95,0	95,0	96,0	96,0	97,0	97,0
	E	dB(A)	89,0	89,0	89,0	90,0	90,0	91,0	91,0	92,0	92,0
Sound pressure level (10 m)	A	dB(A)	62,0	62,0	62,0	63,0	63,0	64,0	64,0	64,0	64,0
	E	dB(A)	57,0	57,0	57,0	58,0	58,0	59,0	59,0	59,0	59,0

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

Size			2352	2502	2652	2802	3002	3202	3402	3602
Compressor										
Type	A,E	type	Screw							
Number	A,E	no.	2	2	2	2	2	2	2	2
Circuits	A,E	no.	2	2	2	2	2	2	2	2
Refrigerant	A,E	type	R134a							
System side heat exchanger										
Type	A,E	type	Shell and tube							
Number	A,E	no.	1	1	1	1	2	2	2	2
System side hydraulic connections										
Connections (in/out)	A,E	Type	Grooved joints							
Sizes (in/out)	A,E	Ø	6"							
Fan										
Type	A,E	type	Axial							
Fan motor	A	type	Asynchronous							
	E	type	Asynchronous with phase cut							
Number	A,E	no.	10	10	10	10	12	12	14	16
Air flow rate	A	m^3/h	196000	196000	191500	187000	229800	224400	268200	312000
	E	m^3/h	137200	137200	134050	130900	196140	157080	187740	218400
Sound data calculated in cooling mode (1)										
Sound power level	A	dB(A)	97,0	97,0	97,0	97,0	97,0	98,0	99,0	99,0
	E	dB(A)	92,0	92,0	92,0	92,0	92,0	93,0	94,0	94,0
Sound pressure level (10 m)	A	dB(A)	64,0	65,0	65,0	65,0	64,0	65,0	66,0	66,0
	E	dB(A)	59,0	60,0	60,0	60,0	59,0	60,0	61,0	61,0

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

DIMENSIONS



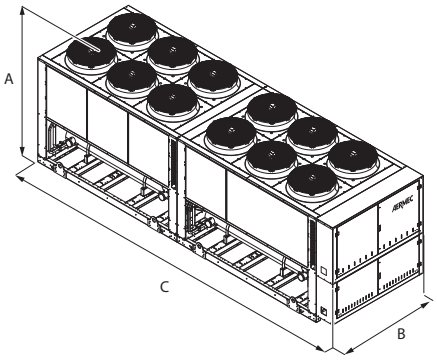

Size			1251	1401	1402	1601	1602	1801	1802	2002	2202	2352	2502	2652	2802	3002	3202	3402	3602
Dimensions and weights																			
A	A,E	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
B	A,E	mm	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
C	A,E	mm	3780	3780	3780	3780	3780	4770	4770	5750	5750	5750	5750	5750	5750	7160	7160	8150	8150
Weights																			
Without hydronic kit	A,E	kg	3245	3280	3570	3435	3835	4115	4005	4385	4570	4940	5265	5470	5610	6540	6745	7425	8105

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com